

P1.86 indoor module



	P1.86
	320*160mm
	289050 dots/m ²
	SMD1515
	172*86 dots
	15mm
	0.45kgs
	constant drive, 43S
	≥ 500 cd/m ²
	AC110/220V±10%
	≤ 200W/m ²
	≤ 500W/m ²

P2 indoor module




	P2	P2
	320*160mm	256*128mm
	250000 dots/m ²	250000 dots/m ²
	SMD1515	SMD1515
	160*80 dots	128*64 dots
	15mm	15mm
	0.45kgs	0.2kgs
	constant drive, 40S	constant drive, 32S
	≥ 500 cd/m ²	≥ 500 cd/m ²
	AC110/220V±10%	AC110/220V±10%
	≤ 200W/m ²	≤ 200W/m ²
	≤ 500W/m ²	≤ 500W/m ²

Project case




P1.875 indoor module



	P1.875
	240*240mm
	284444 dots/m ²
	SMD1515
	128*128 dots
	15mm
	0.25kgs
	constant drive, 64S
	≥ 500 cd/m ²
	AC110/220V±10%
	≤ 200W/m ²
	≤ 500W/m ²

P2.5 indoor module




	P2.5
	320*160mm
	160000 dots/m ²
	SMD2121
	128*64 dots
	15mm
	0.45kgs
	constant drive, 32S
	≥ 750 cd/m ²
	AC110/220V±10%
	≤ 200W/m ²
	≤ 500W/m ²

Project case



P2.604 indoor module

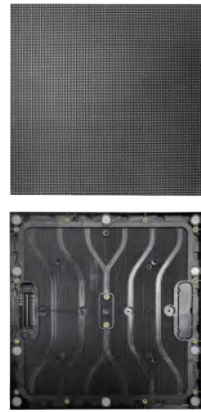


	P2.604
	250*250mm
	147456 dots/m ²
	SMD1515
	96*96 dots
	16mm
	0.52kgs
	constant drive, 32S
	≥ 750 cd/m ²
	AC110/220V±10%
	≅ 200W/m ²
	≅ 500W/m ²

P2.976 indoor module




	P2.976
	250*250mm
	112896 dots/m ²
	SMD2121
	84*84 dots
	16mm
	0.52kgs
	constant drive, 28S
	≥ 750 cd/m ²
	AC110/220V±10%
	≅ 200W/m ²
	≅ 500W/m ²

P3 indoor module

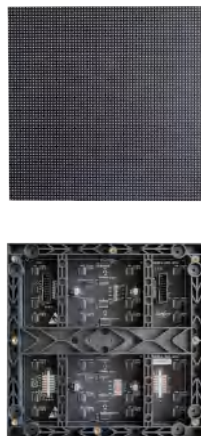

	P3
	192*192mm
	111111dots/m ²
	SMD2121
	64*64 dots
	15mm
	0.21kgs
	constant drive, 32S
	≥ 750 cd/m ²
	AC110/220V±10%
	≅ 200W/m ²
	≅ 500W/m ²

P3.076 indoor module

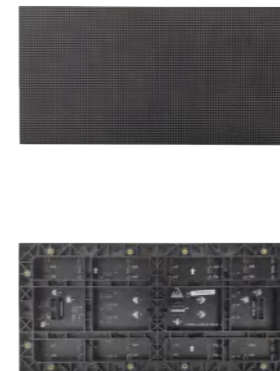

	P3.076
	320*160mm
	105625 dots/m ²
	SMD2121
	104*52 dots
	15mm
	0.5kgs
	constant drive, 26S
	≥ 750 cd/m ²
	AC110/220V±10%
	≅ 200W/m ²
	≅ 500W/m ²


Project case



Project case




P3.91 indoor module

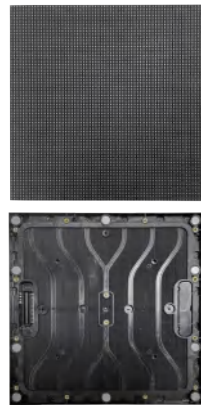

	P3.91
	250*250mm
	65536 dots/m ²
	SMD2121
	64*64 dots
	15mm
	0.52kgs
	constant drive, 16S
	≥ 750 cd/m ²
	AC110/220V±10%
	≤ 200W/m ²
	≤ 500W/m ²

P4.81 indoor module

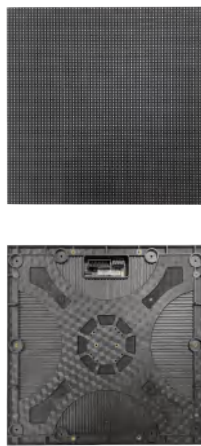

	P4.81
	250*250mm
	43264 dots/m ²
	SMD2121
	52*52 dots
	15mm
	0.52kgs
	constant drive, 13S
	≥ 750 cd/m ²
	AC110/220V±10%
	≤ 200W/m ²
	≤ 500W/m ²

Project case



P4 indoor module



	P4	P4
	320*160mm	256*128mm
	62500 dots/m ²	62500 dots/m ²
	SMD2121	SMD2121
	80*40 dots	64*32 dots
	15mm	15mm
	0.35kgs	0.2kgs
	constant drive, 20S	constant drive, 16S
	≥ 750 cd/m ²	≥ 750 cd/m ²
	AC110/220V±10%	AC110/220V±10%
	≤ 200W/m ²	≤ 200W/m ²
	≤ 500W/m ²	≤ 500W/m ²

P5 indoor module



	P5
	320*160mm
	40000 dots/m ²
	SMD2121
	64*32 dots
	15mm
	0.3kgs
	constant drive, 16S
	≥ 750 cd/m ²
	AC110/220V±10%
	≤ 200W/m ²
	≤ 500W/m ²

Project case



P2.976 outdoor module



	P2.976
	250*250mm
	112896 dots/m ²
	SMD1415
	84*84 dots
	15mm
	0.58kgs
	constant drive, 21S
	4500-5000cd/m ²
	AC110/220V±10%
	≅200W/m ²
	≅500W/m ²

P3.91 outdoor module




	P3.91
	250*250mm
	65536 dots/m ²
	SMD1921
	64*64 dots
	15mm
	0.58kgs
	constant drive, 16S
	4500-5000cd/m ²
	AC110/220V±10%
	≅340W/m ²
	≅680W/m ²

Project case




P3 outdoor module

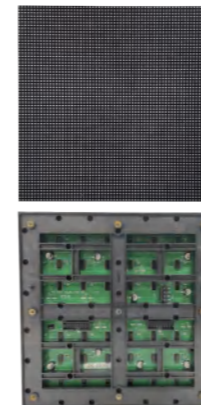

	P3
	192*192mm
	111111 dots/m ²
	SMD1415
	64*64 dots
	15mm
	0.36kgs
	constant drive, 16S
	≅5000 cd/m ²
	AC110/220V±10%
	≅420W/m ²
	≅840W/m ²

P4 outdoor module energy saving

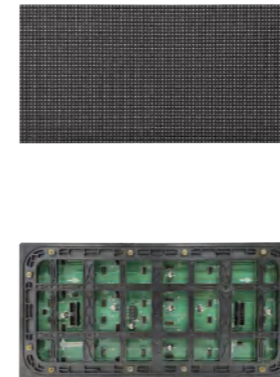


	P4
	320*160mm
	62500 dots/m ²
	SMD1921
	80*40 dots
	15mm
	0.85kgs
	constant drive, 10S
	≅5500 cd/m ²
	AC110/220V±10%
	≅100W/m ²
	≅500W/m ²

Project case



P4 outdoor module



	P4	P4
	256*128mm	320*160mm
	62500 dots/m ²	62500 dots/m ²
	SMD1921	SMD1921
	64*32 dots	80*40 dots
	15mm	15mm
	0.29kgs	0.43kgs
	constant drive, 8S	constant drive, 10S
	≥ 6500 cd/m ²	≥ 5500 cd/m ²
	AC110/220V±10%	AC110/220V±10%
	≤ 420W/m ²	≤ 390W/m ²
	≤ 840W/m ²	≤ 780W/m ²

P5 outdoor module




	P5
	320*160mm
	40000 dots/m ²
	SMD1921/ SMD2727
	64*32 dots
	16mm
	0.46kgs
	constant drive, 8S
	≥ 5500 cd/m ²
	AC110/220V±10%
	≤ 390W/m ²
	≤ 780W/m ²

Project case



P4.81 outdoor module




	P4.81
	250*250mm
	43264 dots/m ²
	SMD1921
	52*52 dots
	16mm
	0.58kgs
	constant drive, 13S
	4500-5000 cd/m ²
	AC110/220V±10%
	≤ 340W/m ²
	≤ 680W/m ²

P5 outdoor module energy saving



	P5
	320*160mm
	40000 dots/m ²
	SMD1921/ SMD2727
	64*32 dots
	15mm
	0.85kgs
	constant drive, 8S
	≥ 5500 cd/m ²
	AC110/220V±10%
	≤ 100W/m ²
	≤ 500W/m ²

Project case

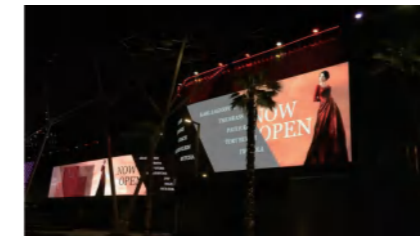


P5.95 outdoor module



	P5.95
	250*250mm
	28224 dots/m ²
	SMD2727
	42*42 dots
	15mm
	0.58kgs
	constant drive, 7S
	4500-5000 cd/m ²
	AC110/220V±10%
	≦340W/m ²
	≦680W/m ²

P6 outdoor module




	P6
	192*192mm
	27777 dots/m ²
	SMD2727/ SMD3535
	32*32 dots
	16mm
	0.34kgs
	constant drive, 8S
	≧5500 cd/m ²
	AC110/220V±10%
	≦340W/m ²
	≦680W/m ²

Project case



P6 outdoor module energy saving



	P6
	192*192mm
	27777 dots/m ²
	SMD3535
	32*32 dots
	15mm
	0.5kgs
	constant drive, 8S
	≧5500 cd/m ²
	AC110/220V±10%
	≦100W/m ²
	≦400W/m ²

P6.67 outdoor module





	P6.67
	320*160mm
	22477 dots/m ²
	SMD3535
	48*24 dots
	15mm
	0.55 kgs
	constant drive, 6S
	≧5500 cd/m ²
	AC110/220V±10%
	≦390W/m ²
	≦780W/m ²

Project case





P8 outdoor module

	P8	P8
Size	256*128mm	320*160mm
Density	15625 dots/m ²	15625 dots/m ²
Chip	SMD3535	SMD3535
Pixel Pitch	32*16 dots	40*20 dots
Thickness	17mm	17mm
Weight	0.27kgs	0.47kgs
Drive	constant drive, 4S	constant drive, 5S
Brightness	≥ 6000 cd/m ²	≥ 5500 cd/m ²
Voltage	AC110/220V±10%	AC110/220V±10%
Power	≤ 420W/m ²	≤ 390W/m ²
Power	≤ 840W/m ²	≤ 780W/m ²

P10 outdoor module






	P10	P10
Size	320*160mm	320*160mm
Density	10000 dots/m ²	10000 dots/m ²
Chip	SMD3535	SMD3535
Pixel Pitch	32*16 dots	32*16 dots
Thickness	17mm	17mm
Weight	0.45kgs	0.41kgs
Drive	constant drive, 2S	constant drive, 4S
Brightness	≥ 6500 cd/m ²	≥ 5000 cd/m ²
Voltage	AC110/220V±10%	AC110/220V±10%
Power	≤ 420W/m ²	≤ 270W/m ²
Power	≤ 840W/m ²	≤ 540W/m ²

Project case





P8 outdoor module energy saving

	P8
Size	320*160mm
Density	15625 dots/m ²
Chip	SMD3535
Pixel Pitch	40*20 dots
Thickness	15mm
Weight	0.6kgs
Drive	constant drive, 5S
Brightness	≥ 5500 cd/m ²
Voltage	AC110/220V±10%
Power	≤ 100W/m ²
Power	≤ 400W/m ²

P10 outdoor module energy saving

	P10	P10
Size	320*160mm	320*160mm
Density	10000 dots/m ²	10000 dots/m ²
Chip	SMD3535	SMD3535
Pixel Pitch	32*16 dots	32*16 dots
Thickness	15mm	15mm
Weight	0.6kgs	0.6kgs
Drive	constant drive, 2S	constant drive, 4S
Brightness	≥ 6500 cd/m ²	≥ 5000 cd/m ²
Voltage	AC110/220V±10%	AC110/220V±10%
Power	≤ 100W/m ²	≤ 100W/m ²
Power	≤ 400W/m ²	≤ 400W/m ²

Project case

